

Document:	Kroger attendant station power draw and dimensions
Last Update:	2012-12-13
Owner:	Fujitsu National Technical Support

NOTICE AND DISCLAIMER

© 2012 Fujitsu America, Inc. All rights reserved. The information in this document is subject to change without notice.

Fujitsu America, Inc. ("FAI") makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

FAI shall not be liable for errors contained herein, or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

No part of this document may be disclosed, reproduced, photocopied, transcribed into a different medium or format, or translated to another language, in whole or in part, without the prior written consent of FAI.


Kroger attendant station power draw and dimensions

The casing is provided by Royston.

25 ½ inches wide (across the front)

31 ¼ inches deep (across the side)

42" inches tall

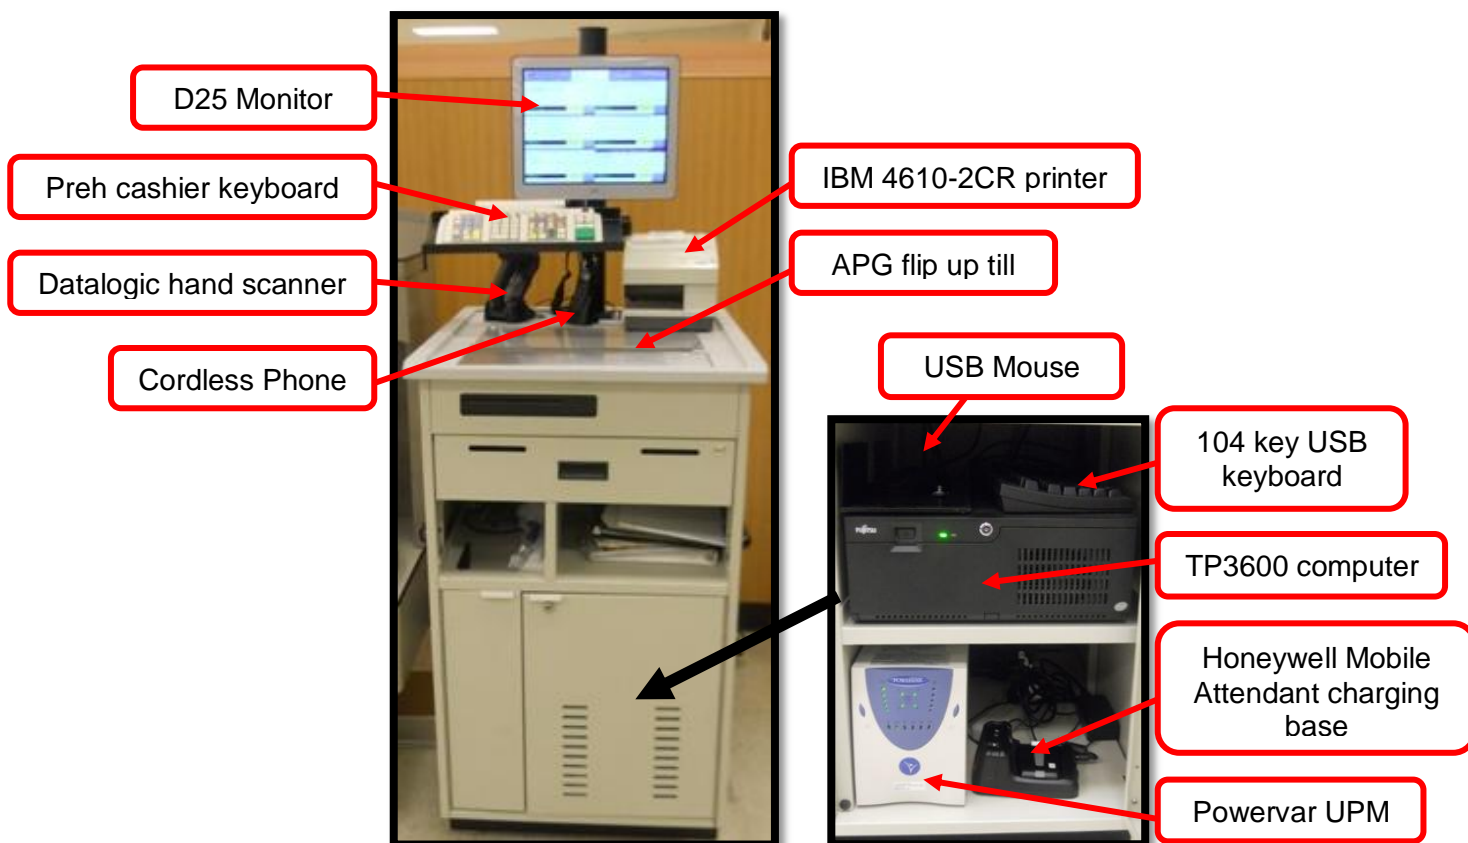

Part Description	Power usage	Size (L x W x H) in inches
IBM 4610-2CR Printer	24V 3.125A	11 x 8 x 8
Honewell Mobile Attendant including charging base	12v 3A	6 x 4.5 x 7.5
D25 15" display	12v 3.3A	2.5 x 9 x 14.25
Datalogic hand scanner including base vertically mounted	12v 150mA	6 x 4 x 7
Datalogic hand scanner including base horizontally mounted	12v 150mA	8.25 x 4 x 5
TP3600 computer	between 45 and 100 watts	19.5 x 13.125 x 5.5
104 Key USB computer keyboard	usage is combined with the TP3600 computer	6.25 x 18 x 1.5
USB optical mouse	usage is combined with the TP3600 computer	4.5 x 2.375 x 1.5
Preh cashier keyboard	usage is combined with the TP3600 computer	6.5 x 13.25 x 3.5
Powervar UPM (varies)	5A max @ 60hz	18.5 x 5.75 x 8
Cordless phone (varies)	8V 300mA	3.1 x 3.2 x 6.9
Cashier flip up till	usage is combined with the IBM 4610-2CR printer	6.8 x 18.1 x 4