




SELF-SERVICE DELI & MEAT
HUSSMANN - Q2-SSM-R






Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

REVISION DATE 01/14/21

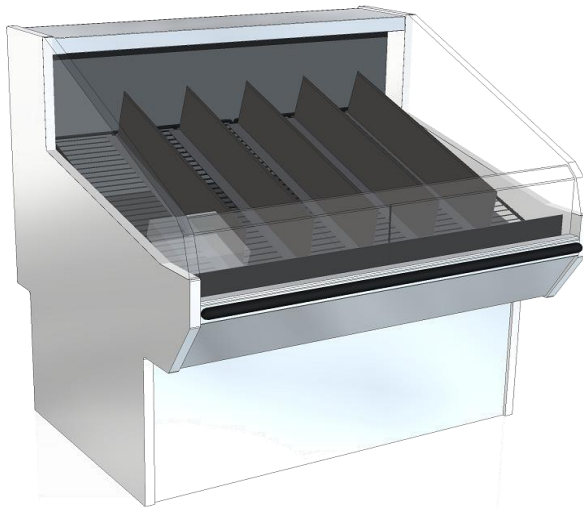

STANDARD / DELI

ADJUSTABLE MEAL KIT / MEAT / SUSHI

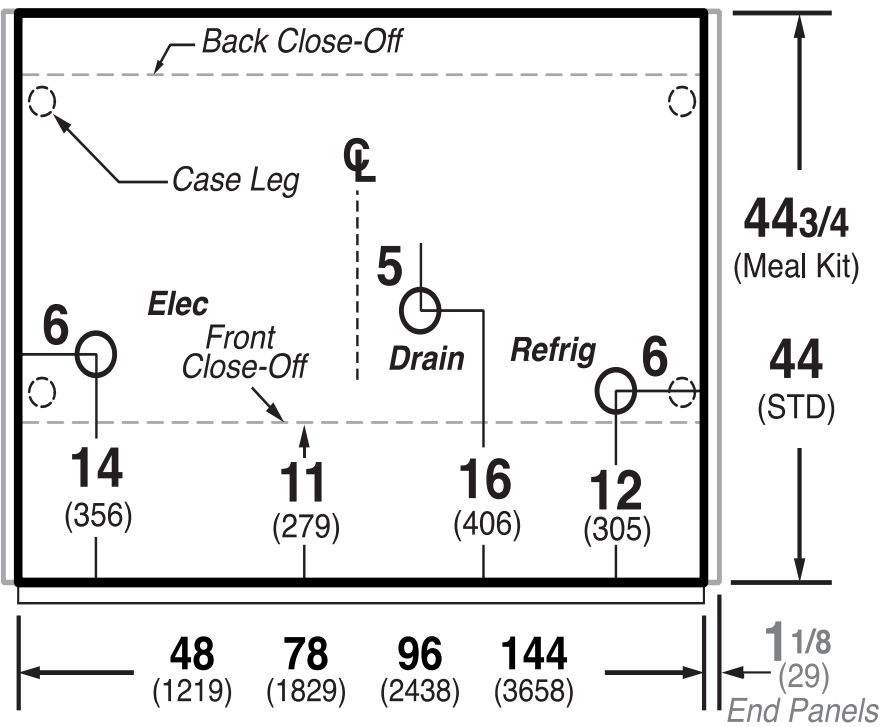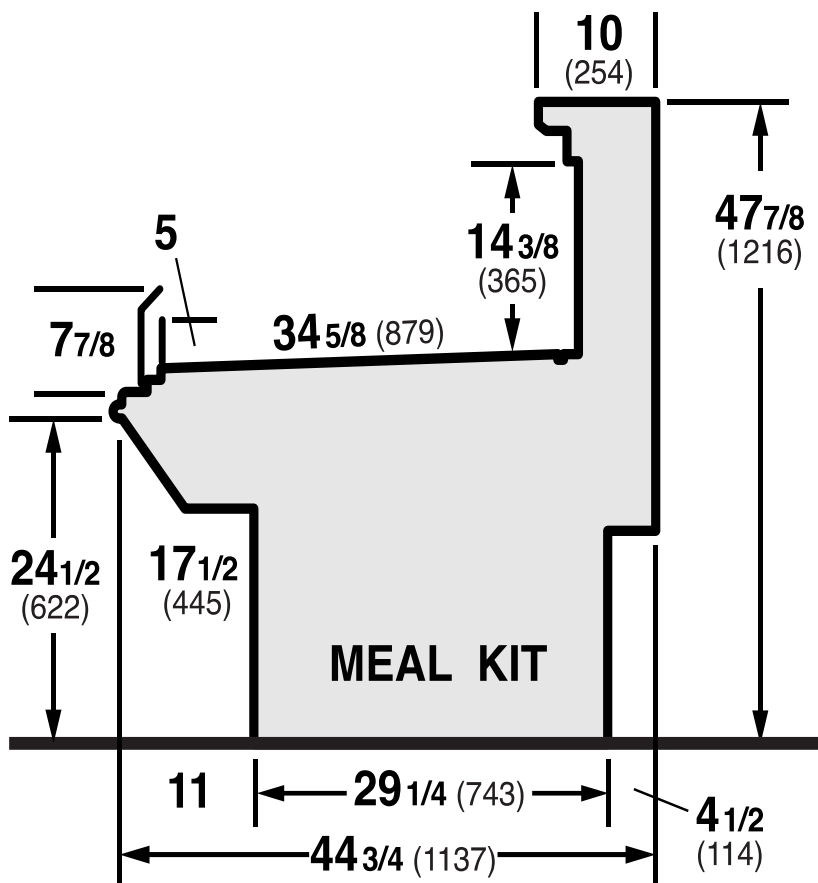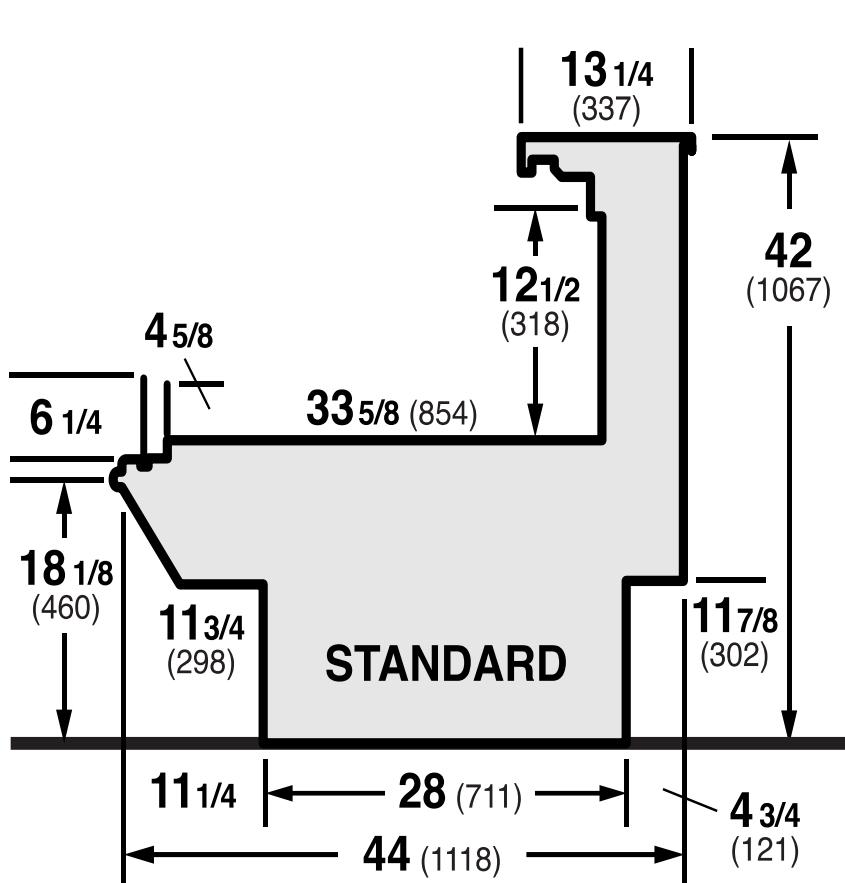

REFRIGERATION DATA:

CASE LENGTHS/ WEDGES	CASE USAGE	CAPACITY *** (BTU/HR/FT) (TOTAL FOR WEDGES)		TEMPERATURE (°F)			VELOCITY (FT/MIN)
		RATING CONDITION		EVAPORATOR		DISCHARGE AIR ** (°F)	
		NSF 7	AHRI 1200	NSF 7	AHRI 1200	NSF 7	
4', 6', 8', 12'	MEALKIT AIR PAN DELI	600	600	22	22	28~34	170 ~ 250
	MEALKIT AIR PAN MEAT	640	640	20	20	26~32	170 ~ 250
4', 6', 8', 12'	STANDARD DELI	640	640	22	22	28~30	150 ~ 175

CASE LENGTH	EST. REFG. CHRG. 404a (LBS)	GLYCOL (20°F INLET, 6° RISE)	
		GPM	PSI
4'	0.5	0.9	2.4
6'	0.7	1.4	5.4
8'	1.0	1.8	2.5
12'	1.5	2.6	5.1

**FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB; REAR STORAGE MEASURED AT EXIT TO COIL

***REFRIGERATION NOTES:

- 1) BTU'S DO NOT INCLUDE LIGHTS
- 2) AHRI 1200 RATING POINT FOR ENERGY CONSUMPTION COMPARISON ONLY
- 3) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT. ADJUST EVAPORATOR PRESSURE AS NEEDED TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SHOWN.
- 4) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

REFRIGERATION DATA CONTINUED:

CASE	ELEC. THERMOSTAT / AIR SENSOR SETTINGS			DEFROST TYPE	TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) COIL ONLY	DRIP TIME	DEFROST WATER (LBS/DAY/FT)
	USAGE	CUT IN (°F)	CUT OUT (°F)						
4', 6', 8', 12'	MEALKIT AIR PAN DELI	31	29	OFF TIME	25	6	48	N/A	2.7
	MEALKIT AIR PAN MEAT	30	28				45		2.9
4', 6', 8', 12'	STANDARD DELI	31	28		35	4	48	N/A	4.2

END PANEL WIDTH KEY		
# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

ELECTRICAL DATA:

STANDARD FANS, HEATERS, LED LIGHTS (115 VOLT)

CASE LENGTH	USAGE	EVAPORATOR FANS:					CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)		ANTI-SWEAT HEATERS	
		# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH (°)	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
4'	MEALKIT	2	6.7	25	0.24	16	N/A						0.17	20
6'		4	6.7	25	0.48	32							0.26	30
8'		4	6.7	25	0.48	32							0.35	40
12'		6	6.7	25	0.72	48							0.52	60
4'	STANDARD	2	6.7	25	0.24	16	0.09	10	0.09	10	0.18	21	N/A	
6'		4	6.7	25	0.48	32	0.13	15	0.13	15	0.27	31		
8'		4	6.7	25	0.48	32	0.18	21	0.18	21	0.36	41		
12'		6	6.7	25	0.72	48	0.27	31	0.27	31	0.54	62		