



TRUE SALES COMPANY

2001 East Terra Lane, O'Fallon,
Missouri, 63366-4434
Tel: 636.240.2400
Toll Free: 888.818.8783
Fax: 636.980.3541
Parts Tel: 800.424.8783
Parts Fax: 636.272.9471
www.truemfg.com

TRUE VISUAL MERCHANDISER Slim Line Refrigerator with Hydrocarbon Refrigerant~Swing Door Version 02

TVM-48SL-HC~SW02



- ▶ The world's #1 manufacturer of glass door merchandisers.
- ▶ Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- ▶ High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- ▶ Exterior - non-peel or chip black powder coated; durable and permanent.
- ▶ Interior - attractive, NSF approved, black aluminum interior liner with stainless steel floor.
- ▶ Self closing doors.
- ▶ Ten (10) adjustable, cantilever shelves.
- ▶ Glass door assemblies with low profile door frame.
- ▶ LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- ▶ Entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

Bottom mounted units feature

- ▶ "No stoop" lower shelf to maximize product visibility.
- ▶ Storage on top of cabinet.
- ▶ Easily accessible condenser coil for cleaning.



Printed in U.S.A.

ROUGH-IN DATA

Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number). Specifications subject to change without notice.

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)				HP	Voltage	Amps	NEMA Config.	Cord Length (total ft.) (total m)	Crated Weight (lbs.) (kg)
			L	D	H*	H**						
TVM-48SL-HC~SW02	2	10	47 1/8 1197	24 5/8 686	78 3/4 2001	82 3/4 2102	1/2 1/2	115/60/1 230-240/50/1	10.8 4.9	5-15P ▲	10 3.35	655 298

† Depth does not include 1 1/2" (38 mm) for door handles.

† Depth does not include 1" (26 mm) for rear bumpers.

* Height without radius sign panel.

** Height with radius sign panel. Sign panel adds 4" (101 mm).

▲ Plug type varies by country.

TRUE VISUAL MERCHANDISER
Slim Line Refrigerator with Hydrocarbon
Refrigerant~Swing Door Version 02

TVM-48SL-HC~SW02

STANDARD FEATURES

DESIGN

- True's commitment to using the highest quality materials and factory balanced refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive visual merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.

- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

CABINET CONSTRUCTION

- Exterior - non-peel or chip black powder coated; durable and permanent.
- Interior - attractive, NSF approved, black aluminum liner with stainless steel floor.
- Insulation - entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Frame rail fitted with leg levelers.
- Illuminated exterior sign panel. Variety of sign options available.

DOORS

- Glass door assemblies with low profile door frame.
- Each door fitted with 12" (305 mm) long handle.
- Self closing doors.

SHELVING

- Ten (10) adjustable, cantilever shelves.

- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13 mm) increments.

LIGHTING

- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Convenient clean-out drain built in cabinet floor.
- Listed under NSF-7 for the storage and/or display of packaged or bottled product.

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




115/60/1
NEMA-5-15R


OPTIONAL FEATURES/ACCESSORIES

- Upcharge and lead times may apply.
- ☐ 230 - 240V / 50 Hz.
 - ☐ 6" (153 mm) standard legs.
 - ☐ 6" (153 mm) seismic/flanged legs.
 - ☐ 2 1/2" (64 mm) diameter castors.
 - ☐ Additional shelves.

PLAN VIEW

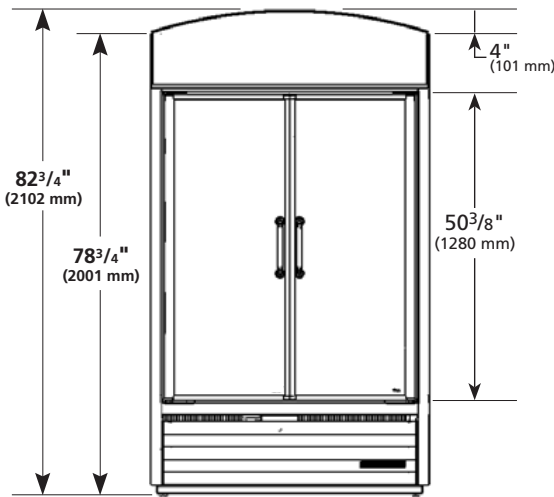

ELEVATION

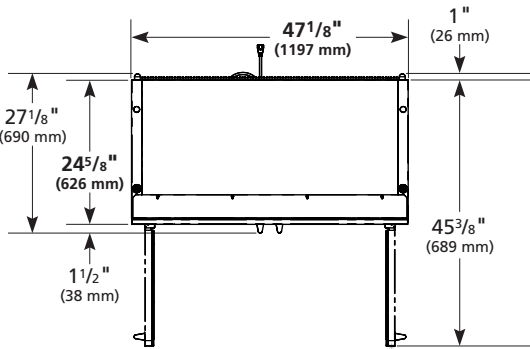

PLAN VIEW

Model	Capacity (20 OZ)	Trailer Loads		
	Standard Shelving	40' Container	48' Trlr load	53' Trlr load
TVM-48SL-HC~SW02	10 Cantiliver Shelves	TBD	TBD	TBD

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

WARRANTY

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only)

*RESIDENTIAL APPLICATIONS: TRUE assumes no liability for parts or labor coverage for component failure or other damages resulting from installation in non-commercial or residential applications.