


## "Delight" Series Hussmann Bakery

**HUSSMANN®**

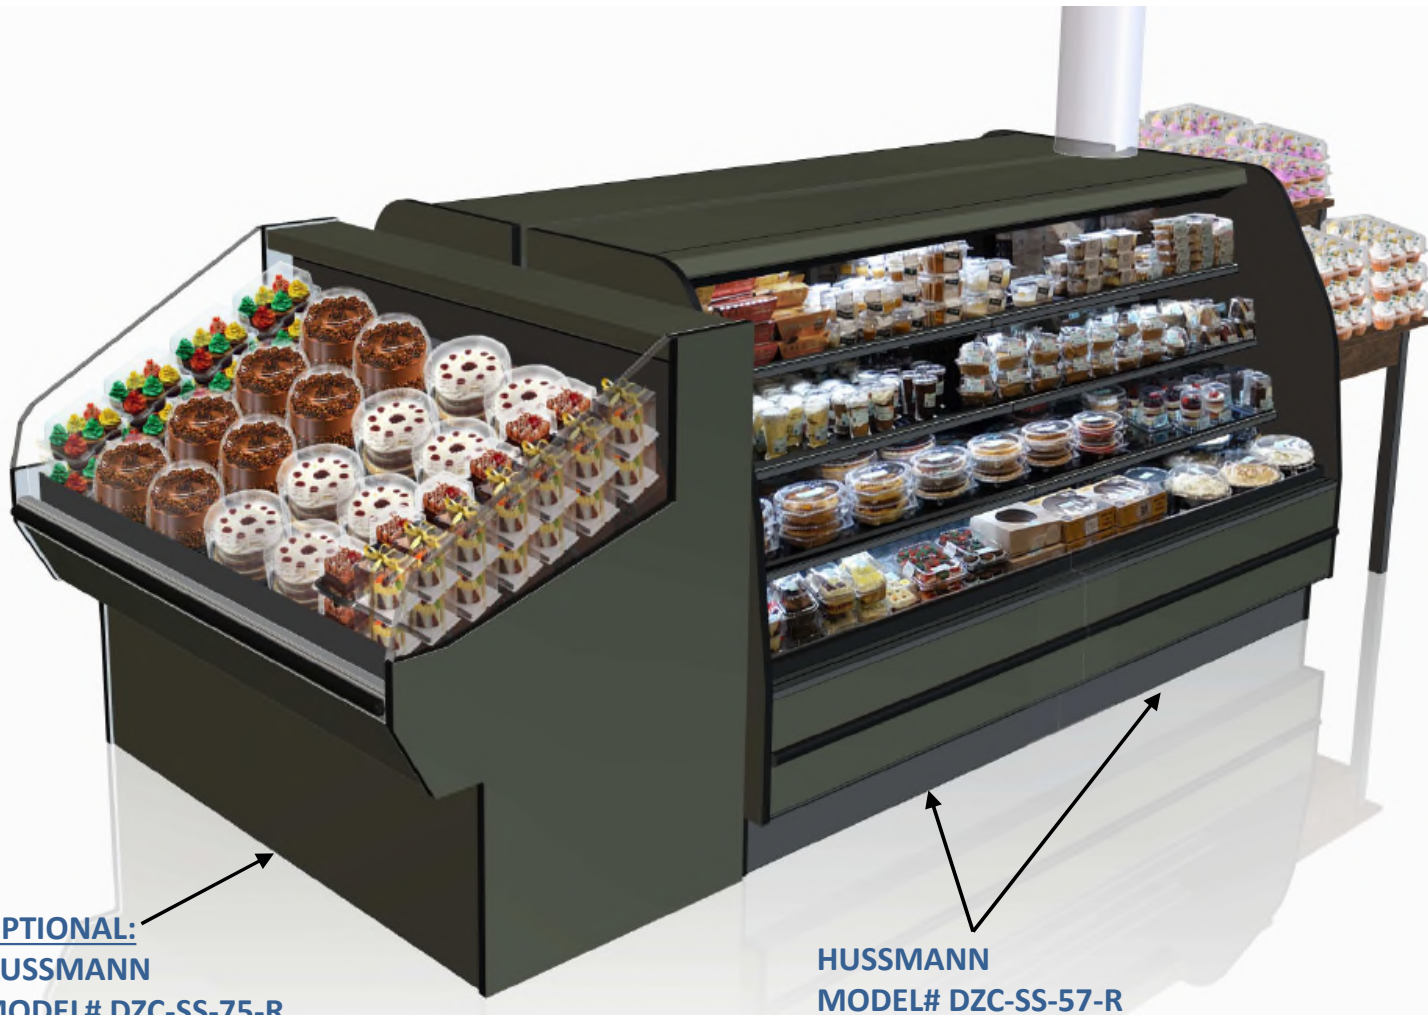

**OPTIONAL:**  
**HUSSMANN**  
**MODEL# DZC-SS-75-R**

**HUSSMANN**  
**MODEL# DZC-SS-57-R**

### FEATURES:


- 3-ROWS OF GLASS SHELVES
- SHELVES ARE ADJUSTABLE
- LED 3500K LIGHTS EA. LEVEL
- 1-3/4 PTM EACH LEVEL
- 1000 SERIES BLACK BUMPER
- BLACK INTERIOR
- POWDER COATED EXT. FINISH
- REFLECTIVE INTERIOR ENDS

(model# Q2-SS-6R-NF shown)

*Confidential*

## “Delight” Series Hussmann Bakery

### CURRENT FLOOR PLAN

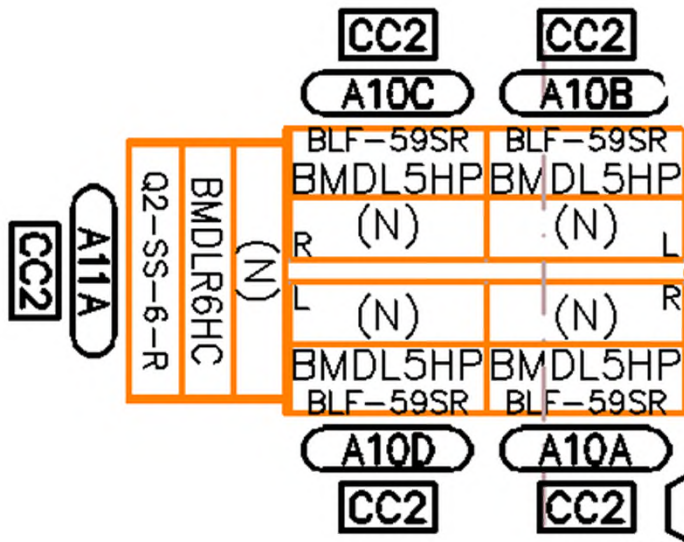

# "Delight" Series Hussmann Bakery


**HUSSMANN®**

## ENERGY COMPARISON

MANUFACTURER	Case	TRUE LENGTH	SPEC BTU/HR/ FT *	TOTAL BTU/H	EVAP
HillPhoenix	BLF-059-SR	59	1150	5834	20
HillPhoenix	BLF-077-SR	77	1150	7649	20
<b>HUSSMANN</b>	<b>DZC-SS-057-R</b>	<b>57</b>	<b>710</b>	<b>3523</b>	<b>22</b>
<b>HUSSMANN</b>	<b>DZC-SS-075-R</b>	<b>75</b>	<b>710</b>	<b>4618</b>	<b>22</b>

**HUSSMANN®**

HillPhoenix BLF

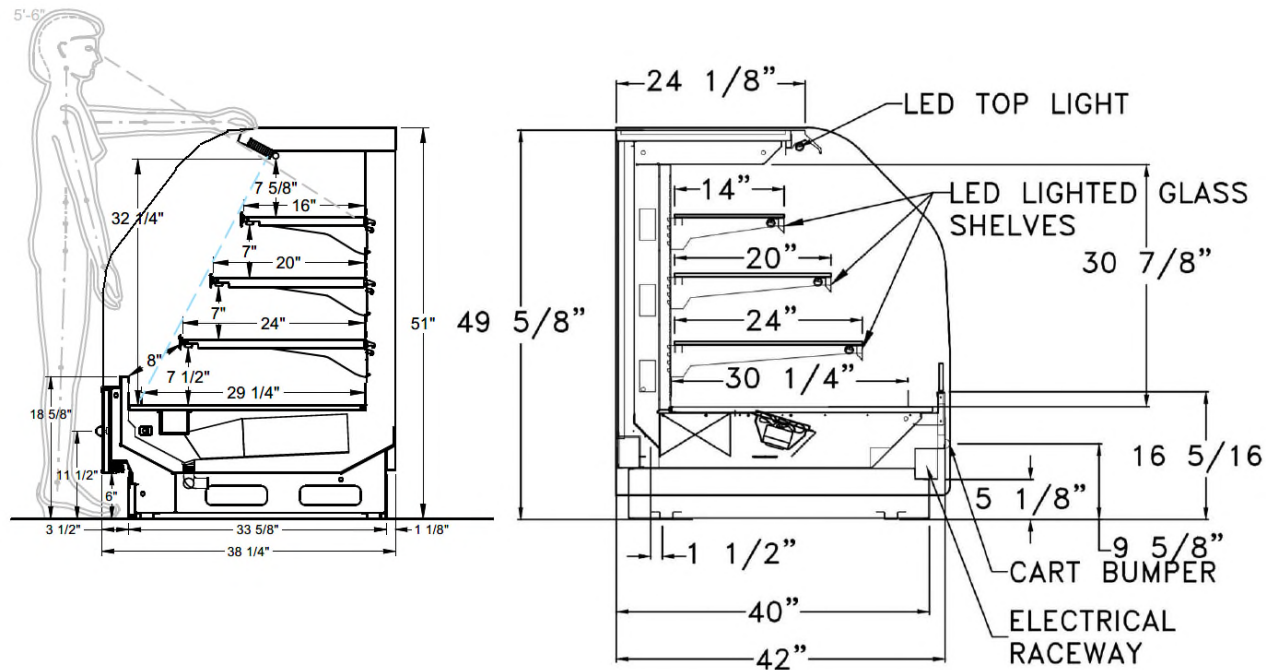

Confidential



## “Delight” Series Hussmann Bakery



Intertek



Intertek

### BAKERY / CAKE SELF-SERVICE



HUSSMANN - DZC-SS-R

DOE 2017  
Energy Efficiency  
Compliant

Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

REVISION DATE

01/25/21

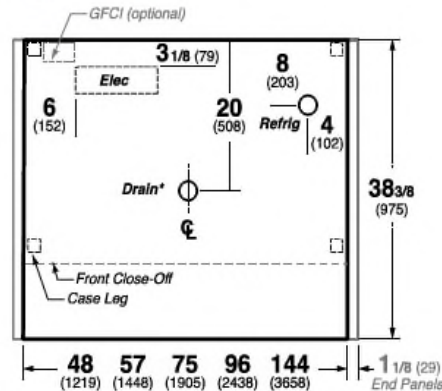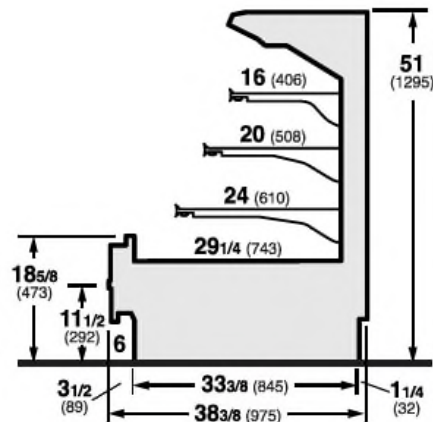

Notes:  
 \*Drain position is for 48" length only, refer to Cadblock drawings for other lengths



### REFRIGERATION DATA:

CASE LENGTHS (IN)	CASE USAGE	CAPACITY *** (BTU/HR/FT*)		TEMPERATURE (°F)			VELOCITY (FT/MIN)
		RATING CONDITION		EVAPORATOR		DISCHARGE AIR ** (°F)	
		NSF 7	AHRI 1200	NSF 7	AHRI	NSF 7	
048, 057, 075, 096, 114, 144	BAKERY	710	710	22	22	30~32	175~225

CASE LENGTHS	20°F GLYCOL 6° RISE	
	GPM	PSI
048	1.06	2.7
057	1.24	4.1
075	1.61	6.5
096	2.03	2.9
144	2.96	5.8

\* WEDGE CAPACITY IS IN TOTAL BTU/HR

\*\*FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB

\*\*\*REFRIGERATION NOTES:

- 1) BTU'S INCLUDE CANOPY LIGHTS. ADD 10 BTUS/SHELF/FT FOR EACH SHELF (LIGHT)
- 2) AHRI 1200 RATING POINT FOR ENERGY CONSUMPTION COMPARISON ONLY
- 3) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT. ADJUST EVAPORATOR PRESSURE AS NEEDED TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SHOWN.
- 4) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

Art Short  
 Sales Principal, Kroger

**HUSSMANN®**

A Panasonic Company

Hussmann Corporation  
 4748 Dunmann Way  
 Grove City, OH 43123  
 Mobile (614) 551-4797

## “Delight” Series Hussmann Bakery

### REFRIGERATION DATA CONTINUED:

ELEC. THERMOSTAT / AIR SENSOR SETTINGS			DEFROST TYPE	TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) COIL ONLY	DRIP TIME	DEFROST WATER (LBS/DAY/FT)
USAGE	CUT IN (°F)	CUT OUT (°F)						
BAKERY	30	26	OFF TIME	30	6	48	N/A	4.2

### END PANEL WIDTH KEY

# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

### ELECTRICAL DATA:

#### STANDARD FANS, LED LIGHTS (115 VOLT)

CASE LENGTH	EVAPORATOR FANS					CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)	
	# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
048	2	6.7	20	0.2	16	0.18	20	0.36	41	0.54	62
057	2	6.7	25	0.2	16	0.23	27	0.36	41	0.59	68
075	3	6.7	25	0.2	16	0.31	36	0.53	61	0.84	96
096	3	6.7	25	0.4	24	0.35	41	0.72	82	1.07	123
144	4	6.7	30	0.5	32	0.53	61	1.08	124	1.61	185

#### OPTIONAL HIGH OUTPUT LED LIGHTS (115 VOLT)

CASE LENGTH	CANOPY LIGHTS H.O. LED		OPTIONAL SHELF		MAX. H.O. LED LOAD	
	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
048	0.18	20	0.53	61	0.71	81
057	0.23	27	0.53	61	0.76	88
075	N/A	N/A	N/A	N/A	N/A	N/A
096	0.35	41	1.06	122	1.41	162
114	0.47	54	1.06	122	1.52	175
144	0.53	61	1.59	183	2.12	244

#### Optional outlets

CONVENIENCE OUTLETS		
# OUTLETS	VOLTS	AMPS
1	115	15
1	115	15
1	115	15
1	115	15
1	115	15
1	115	15