


PLAN

* POWER REQUIREMENTS *

117 V.A.C. 60 HZ
12.5 AMP. WITH HEATER OPTION
2 AMP. WITHOUT HEATER OPTION.

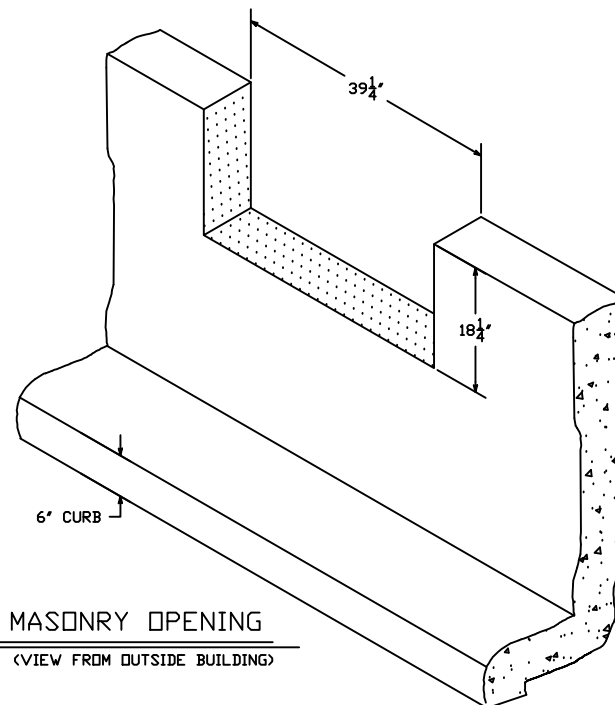


MASONRY OPENING

(VIEW FROM OUTSIDE BUILDING)


BUCKET CAPACITY = 11"H x 15"W x 12"D

THE EXTENSION OF THE BUCKET CAN BE ADJUSTED
FROM 12" MINIMUM TO 16 1/2" MAXIMUM.
(COMES SET @ 16 1/2" FROM FACTORY)

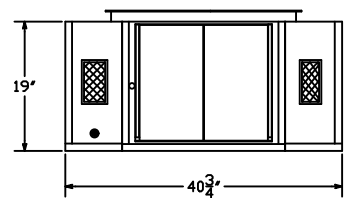


NOTE: DRIVEWAY IS 6" LOWER
THAN INSIDE FINISHED FLOOR.

EXTERIOR ELEVATION

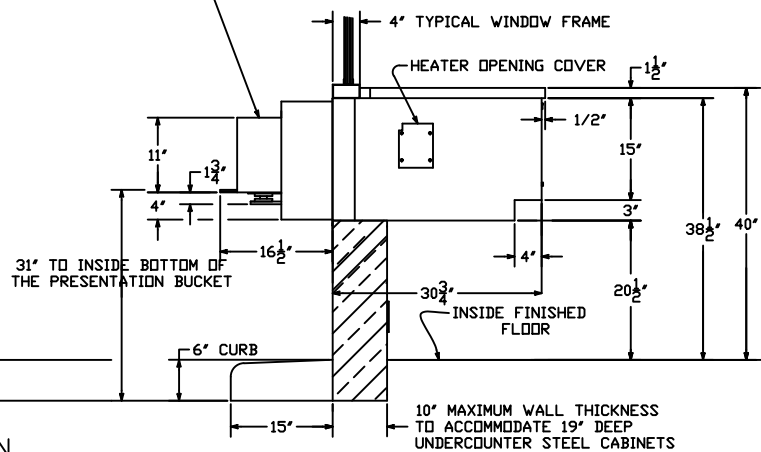

SECTION

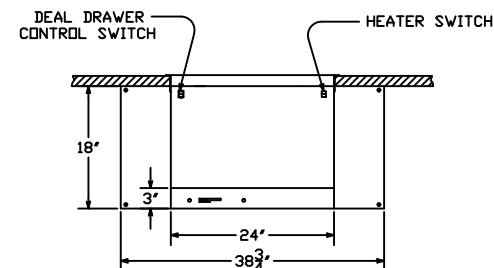

INTERIOR ELEVATION

FOR USE BY DCD18 ONLY, OTHER OUTLETS
REQUIRED FOR OTHER EQUIPMENT...

Rev-5	Date: 7/13/04	CHANGED POWER REQUIREMENT
Rev-4	Date: 9/2/03	CHANGED ELEVATION
Rev-3	Date: 4/23/98	CHGD NOTES & ADDED MISC INFO.
Rev-2	Date: 12/5/96	CHGD NOTES/WINDOW FRAME.
Rev-1	Date: 7/19/96	RAISED THE M.O. ELEVATION.

HAMILTON
BY GUNNEBO

PROPRIETARY AND CONFIDENTIAL
THESE DRAWINGS ARE THE PROPERTY
OF HAMILTON SAFE CO. AND SHALL
NOT BE REPRODUCED, COPIED, USED
AS THE BASIS FOR MANUFACTURE OR
SALE OF APPARATUS WITHOUT
PERMISSION

DESCRIPTION

MODEL DCD18 - UL LISTED
DEAL DRAWER UNIT
COMMERCIAL VERSION

DRAWING/MODEL NUMBER

95-192

DATE

10/26/2021